

FWP North American style bolted tag fuse links



Catalogue symbol

- FWP-(amps)B (5 to 100 A)
- FWP-(amps)A (125 to 1200 A)

Description

North American style bolted tag high speed fuse links.

Technical data

- Rated voltage:
 - 700 V a.c./V d.c. (UL)
- Rated current: 5 - 1200 A
- Breaking capacity:
 - 200 kA RMS Sym
 - 50 kA at 700 V d.c. (FWP-A)
 - 50 kA at 500 V d.c. (FWP-B)

Agency information

- CE
- UL Recognised
 - JFHR2.E91958 FWP-B and FWP-A for 700 to 1200 A
 - JFHR2.E56412 FWP-A for 125 to 600 A
- CSA Component acceptance file class 1422-30 (53787) for 5 to 800 A

Catalogue numbers (amps)

FWP-5B	FWP-125A
FWP-10B	FWP-150A
FWP-15B	FWP-175A
FWP-20B	FWP-200A
FWP-25B	FWP-225A
FWP-30B	FWP-250A
FWP-35D	FWP-300A
FWP-40D	FWP-350A
FWP-50D	FWP-400A
FWP-60D	FWP-450A
FWP-70B	FWP-500A
FWP-80B	FWP-600A
FWP-90B	FWP-700A
FWP-100B	FWP-800A
	FWP-900A
	FWP-1000A
	FWP-1200A

Features and benefits

- Excellent DC performance
- Low arc voltage and low energy let-through (I^2t)
- Superior cycling capability

Typical applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Carton quantity

- 10 per carton (5 to 30 A)
- 5 per carton (35 to 60 A)
- 1 per carton (70 to 1200 A)

Carton weight

- 2.25 (lbs) 5 to 30 A
- 1.21 (lbs) 35 to 60 A
- 0.24 (lbs) 70 to 100 A
- 0.65 (lbs) 125 to 200 A
- 1.17 (lbs) 225 to 400 A
- 2.39 (lbs) 450 to 600 A
- 1.21 (lbs) 700 to 800 A
- 6.60 (lbs) 900 to 1200 A




Powering Business Worldwide

Electrical characteristics

Total clearing I²t


The total clearing I²t at rated voltage and at a power factor of 15 percent are given in the electrical characteristics. For other voltages, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g, (RMS).



- 1) 35 - 100 A
- 2) 125 - 600 A
- 3) 700 to 1200 A

Arc voltage


This curve gives the peak arc voltage, U_L, which may appear across the fuse during its operation as a function of the applied working voltage, E_g, (RMS) at a power factor of 15 percent.



- 1) 125 - 600 A
- 2) 35 - 100 and 700 - 1200 A

Watts losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the watts losses at load currents lower than the rated current. The correction factor, K_p, is given as a function of the RMS load current, I_b, in percent of the rated current.

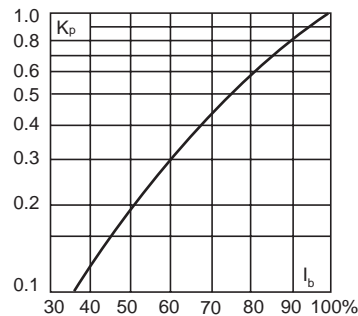


Technical data

Catalogue numbers	Rated voltage V a.c. / V d.c. (UL)	Rated current RMS- Amps	I ² t (A ² Sec)		
			Pre-arc	Clearing at 700 V a.c.	Watts loss**
FWP-5B	700 V a.c.	5	1.6	11	1.5
FWP-10B	/ V d.c.	10	3.6	22	4
FWP-15B	(UL)	15	10	70	5.5
FWP-20B		20	26	180	6
FWP-25B		25	44	320	7
FWP-30B		30	58	450	9
FWP-35D		35	34	160	12
FWP-40D		40	76	320	12
FWP-50D		50	135	600	12
FWP-60D		60	210	950	15.5
FWP-70B		70	305	2000	18
FWP-80B		80	360	2400	21
FWP-90B		90	415	2700	25
FWP-100B		100	540	3500	27
FWP-125A		125	1800	7300	28
FWP-150A		150	2900	11,700	32
FWP-175A		175	4200	16,700	35
FWP-200A		200	5500	22,000	43
FWP-225A		225	7700	31,300	45
FWP-250A		250	10,500	42,500	48
FWP-300A		300	17,600	71,200	58
FWP-350A		350	23,700	95,600	65
FWP-400A		400	31,000	125,000	78
FWP-450A		450	36,400	137,000	94
FWP-500A		500	45,200	170,000	107
FWP-600A		600	66,700	250,000	122
FWP-700A		700	54,000	300,000	125
FWP-800A		800	78,000	450,000	140
FWP-900A		900	91,500	530,000	150
FWP-1000A		1000	120,000	600,000	170
FWP-1200A		1200	195,000	1,100,000	190

**Watts loss provided at rated current

Dimensions - in


5 - 800 A

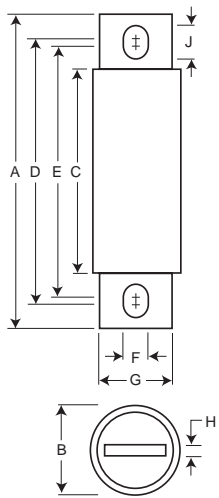


Amp range	A	B	C	D	E	F	G	H	J
5-30	2.87	0.56	1.86	2.48	2.48	0.25	0.41	0.06	0.25
35-60	4.38	0.81	2.75	3.71	3.31	0.34	0.73	0.13	0.54
70-100	4.41	0.95	2.59	3.63	3.56	0.34	0.75	0.13	0.38
125-200	5.09	1.5	2.84	4.19	3.5	0.41	1	0.25	0.75
225-400	5.09	2	2.84	4.28	3.53	0.41	1.5	0.25	0.78
450-600	7.09	2.5	2.84	5.72	4.19	0.53	2	0.38	1.3
700-800	6.63	2	2.76	5.56	5.06	0.63	1.5	0.25	0.88
900-1000	Refer to drawing								
1200	Refer to drawing								

1" = 25.4mm


900 - 1000 A

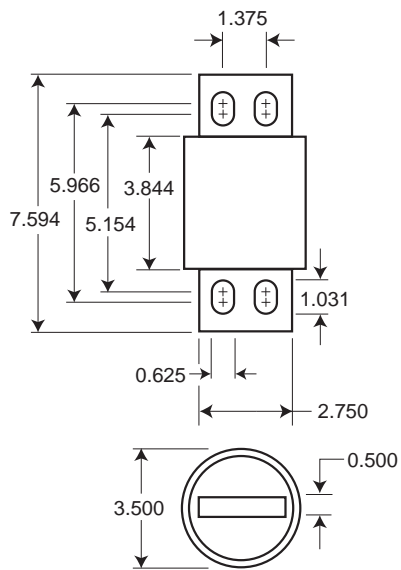

1200 A

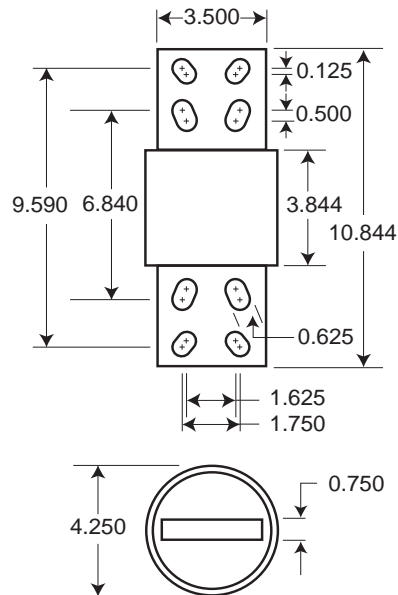


Cut-off curve

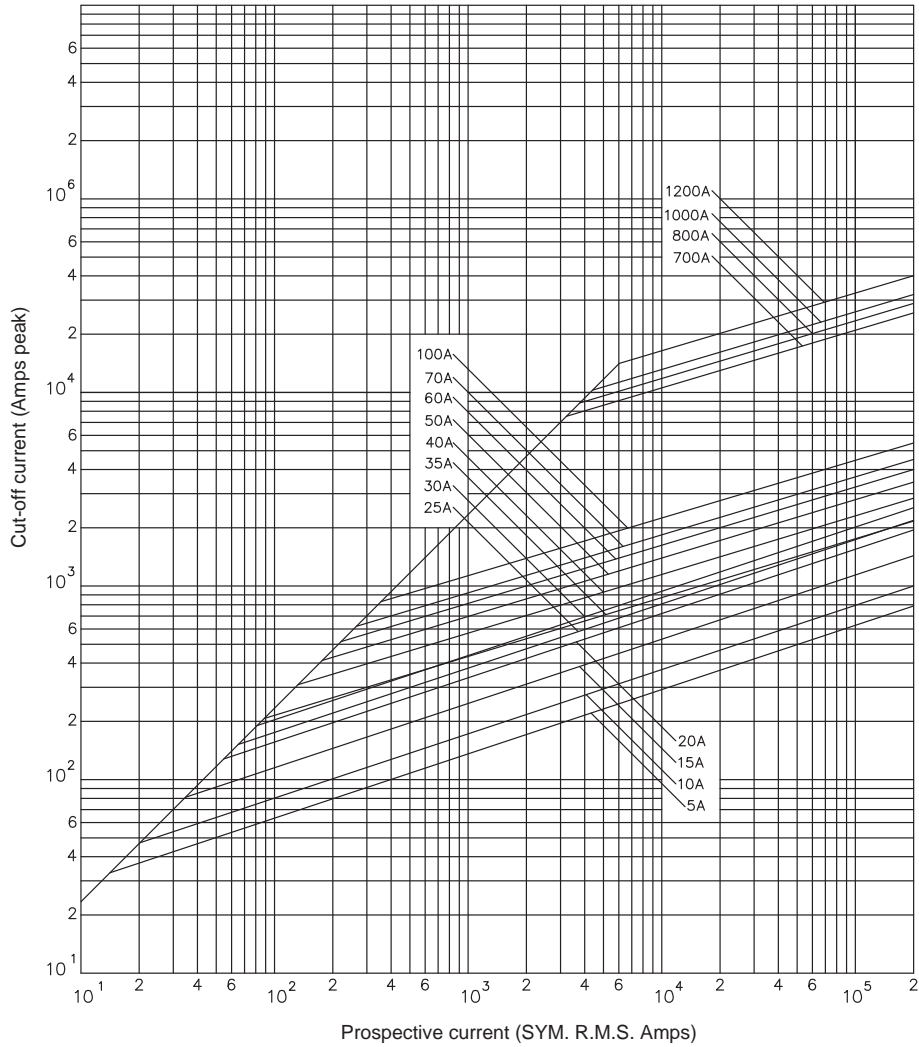


Time-current curve - nominal melt

5 - 30 A

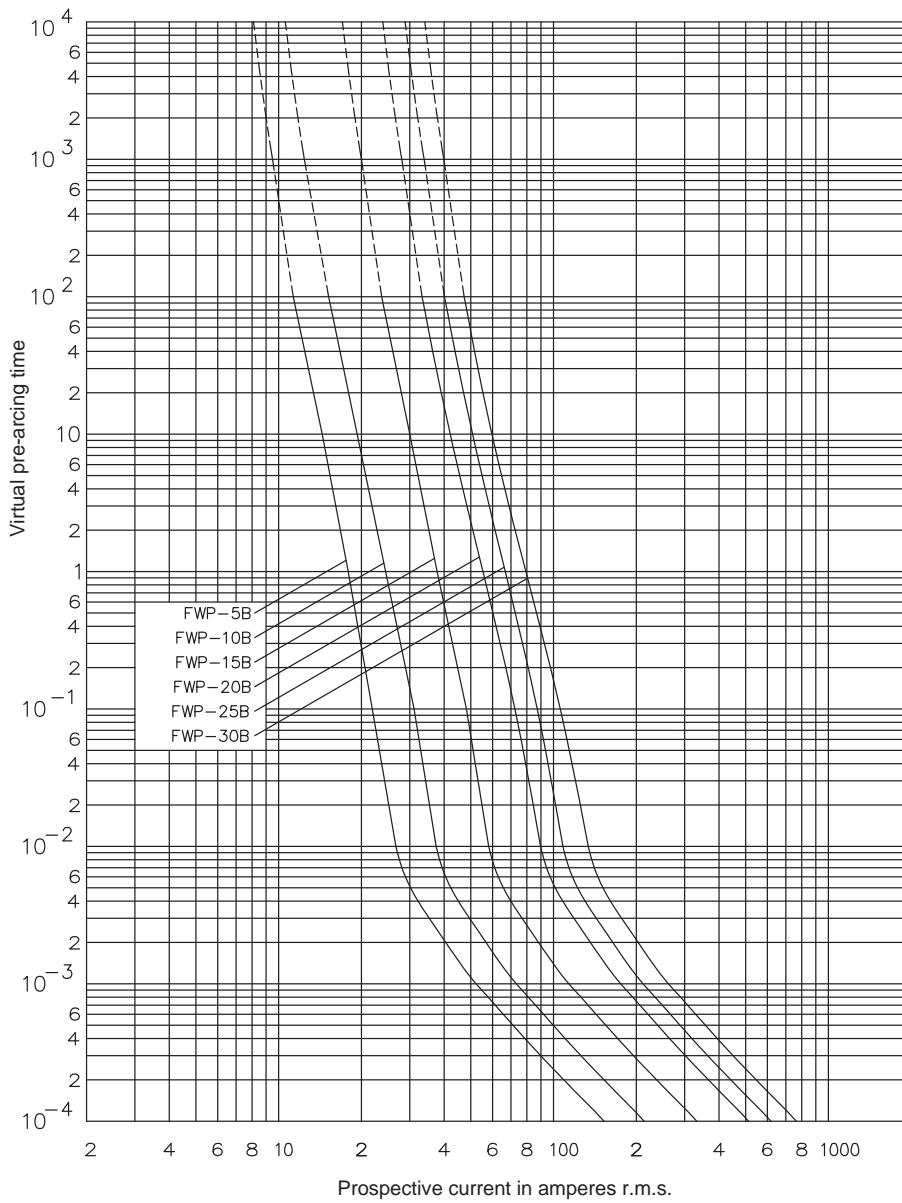

Time-current curve - nominal melt

35 - 1200 A

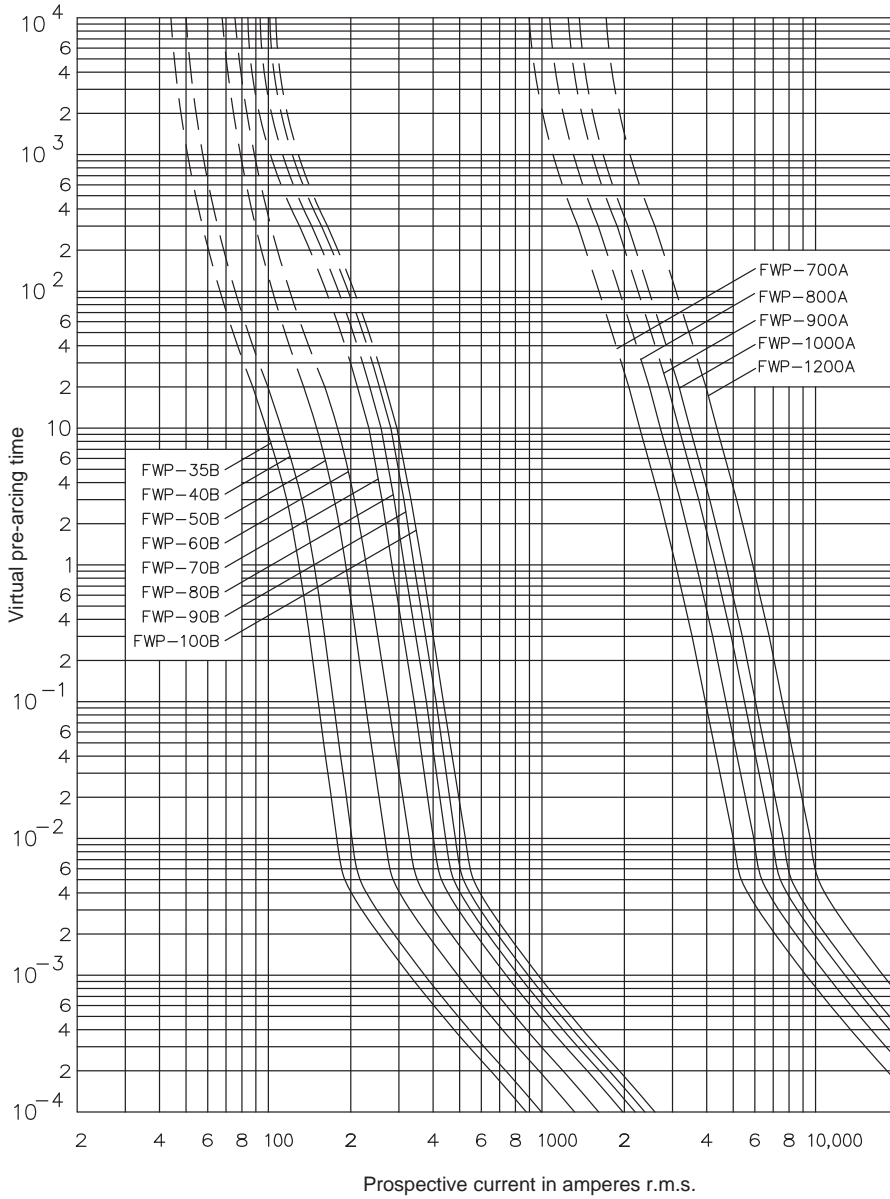

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
 EMEA Headquarters
 Route de la Longeraie 7
 1110 Morges, Switzerland

Eaton Electrical Products Limited
 Unit 1, Hawker Business Park
 Melton Road
 Burton-on-the-Wolds
 Leicestershire, LE12 5TH
 United Kingdom

© 2021 Eaton
 All Rights Reserved
 PDF Only
 Publication No. 720012
 September 2021