

FLEX I/O and FLEX I/O-XT Modules

In-Cabinet Modular I/O Platform

Advantages

Reduced Space: Wire directly from sensor to terminal base and eliminate the terminal strip

Functionality: From two point to 32-point modules offer functions of larger rack-based I/O

Increased Productivity: Easy configuration and setup of I/O modules using wizards speeds engineering and installation

Reduced Downtime: Removal and Insertion Under Power (RIUP) and module level diagnostics

Exceptional Choices: More than 90 varieties and specialty modules meet the needs of a wide variety of applications

Network Flexibility: Communicates on EtherNet/IP™, ControlNet®, DeviceNet®, Remote I/O and other open networks

Improved Plant Operations: HART® analog modules pass through HART data to asset management software or controller for improved plant operations



FLEX™ I/O offers all the functions of larger rack-based I/O without the space requirements. Its cost effectiveness, flexibility, modularity, and reliability have made it one of the most popular distributed I/O platforms.

FLEX I/O helps eliminate multiple long wiring runs, reduces terminations, decreases engineering and installation costs and time, and substantially reduces down time. It complements all Rockwell Automation® controller platforms for a distributed I/O solution.

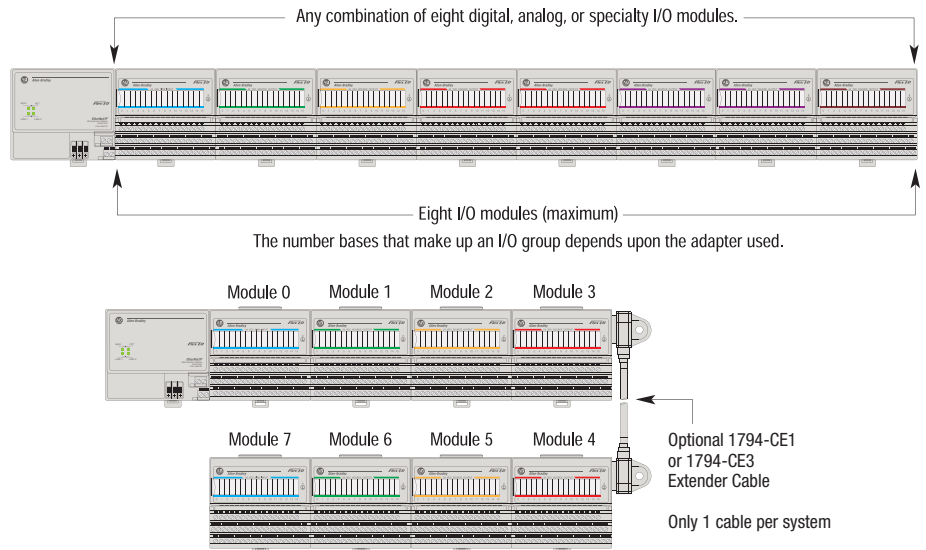
The FLEX I/O system can communicate on EtherNet/IP, ControlNet, DeviceNet, and many other open networks including, but not limited to, Remote I/O, PROFIBUS DP™, and Interbus-S. You can independently select the I/O, termination style, and network to meet your application needs.

LISTEN.
THINK.
SOLVE.®

The FLEX I/O system contains a network adapter, terminal bases, and I/O modules. You can power the system with a FLEX power supply or any other compatible power source. You can use as many as eight terminal bases per adapter, allowing a wide variety of I/O channels per adapter, or mix and match digital, analog and specialty I/O modules to meet your specific needs. For instance,

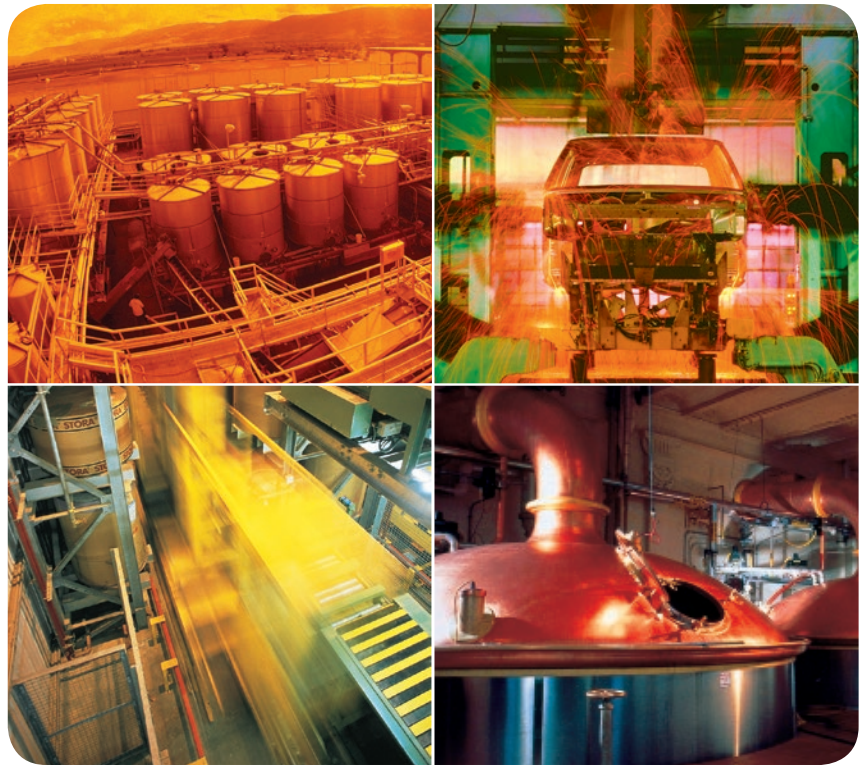
- 256 digital inputs/outputs with 32-point modules
- 96 analog inputs

FLEX I/O can be mounted horizontally or vertically on standard 35mm DIN rail or panel mounted without derating. These modules also come in an XT version, which are conformally coated, and operate in extreme environments. These modules operate in a temperature range from -20 °C to 70 °C.





When using the optional extender cable, module groups are numbered sequentially along the length of the system.

30439-MC








FLEX I/O Products

| General Specifications | | Operating Temperature | | |
|--|--|---|---|--------------------------------------|
| FLEX I/O | | 0...55 °C (32...131 °F) | | |
| FLEX I/O-XT | | -20...70 °C (-4...158 °F) | | |
| Storage Temperature | | -40...85 °C (-40...185 °F) | | |
| Relative Humidity | | 5...95% non-condensing | | |
| Shock, Operating ¹ | | 30 g peak acceleration, 11(±1) ms pulse width | | |
| Shock, Non-Operating ¹ | | 50 g peak acceleration, 11(±1) ms pulse width | | |
| Vibration ¹ | | Tested 5 g @ 10...500 Hz per IEC 68-2-6 | | |
| | | Dimensions (HxWxD), Approx. | Weight | |
| I/O Modules | | 46 x 94 x 53 mm (1.8 x 3.7 x 2.1 in) | 0.1 kg (0.3 lb) | |
| I/O Adapters | | 87 x 68 x 69 mm (3.4 x 2.7 x 2.7 in) | 0.2 kg (0.4 lb) | |
| Terminal Bases | | 94 x 94 x 69 mm (3.7 x 3.7 x 2.7 in) | 0.2 kg (0.5 lb) | |
| Power Supplies | 1794-PS13 | 87 x 68 x 69 mm (3.4 x 2.7 x 2.7 in) | 0.2 kg (0.5 lb) | |
| | 1794-PS3 | 87 x 94 x 69 mm (3.4 x 3.7 x 2.7 in) | 0.4 kg (0.8 lb) | |
| The dimensions for 1794-AENT are 87 x 94 x 69 mm (3.4 x 3.7 x 2.7 in) | | | | |
| 1794-AENTR, 1794-ACN15, and 1794-ACNR15 adapters have the following dimensions: 87.4 x 94 x 92 mm (3.4 x 3.7 x 3.6 in) | | | | |
| Product | Catalog Number | Description | | |
| Communications Components  | Adapter | 1794-ACN15 | 24Vdc ControlNet Adapter | |
| | | 1794-ACNR15 | 24Vdc ControlNet Redundant Media Adapter | |
| | | 1794-ACNR15XT | 24Vdc ControlNet Redundant Media Adapter, XTEMP (-20 °C to 70 °C) | |
| | | 1794-ADN | 24Vdc DeviceNet Adapter | |
| | | 1794-AENT | 24Vdc EtherNet I/P Adapter | |
| | | 1794-AENTR | 24Vdc EtherNet I/P, 2-Port, Twisted-Pair Media | |
| | | 1794-AENTRXT | 24Vdc EtherNet I/P, 2-Port, Twisted-Pair Media, XTEMP (-25 °C to 70 °C) | |
| | | 1794-APB | 12Mbps PROFIBUS DP Adapter | |
| | | 1794-APBDV1 | 12Mbps PROFIBUS DP –V1 Adapter | |
| | | 1794-ASB | 24Vdc Remote I/O Adapter (to 8 modules) | |
| | | 1794-ASB2 | 24Vdc Remote I/O Adapter (to 2 modules) | |
| | Termination Styles  | Terminal Base Units | 1794-TB2 | 2-Wire Cage Clamp Terminal Base Unit |
| | | | 1794-TB3 ² | 3-Wire Cage Clamp Terminal Base Unit |
| | | 1794-TB3S ² | 3-Wire Spring Clamp Terminal Base Unit | |
| | | 1794-TB32 | 32-Point Cage Clamp Terminal Base Unit | |
| | | 1794-TB32S | 32-Point Spring Clamp Terminal Base Unit | |
| | | 1794-TB3T ² | Terminal Base Unit | |
| | | 1794-TB3TS ² | Spring Clamp Temperature Terminal Base Unit | |
| | | 1794-TB3G ² | Cage Clamp Grounded Terminal Base Unit | |
| | | 1794-TB3GS ² | Spring Clamp Grounded Terminal Base Unit | |
| | | 1794-TBN ² | Terminal Base Unit (NEMA-style) | |
| | | 1794-TBNF | Fused Terminal Base Unit (NEMA-style) | |
| | | 1794-TBKD | Knifewitch Disconnect Terminal Base Unit | |
| | | 1794-TB37DS | 37 Pin D-Shell Termination (digital & analog modules) | |
| | | 1794-TB62DS | 62 Pin D-Shell Termination (32pt. I/O modules) | |

¹ To maintain these specifications, you must use DIN rail locks specifications, you must use DIN rail locks

² When product is marked. See specific module installation instructions for details

| | Product | Catalog Number | Description | |
|--|----------------|-----------------|--|-------------------------------|
| AC I/O  | 120Vac Modules | 1794-IA8 | 120Vac 8 Input Module | |
| | | 1794-IA8I | 120Vac 8 Isolated Input Module | |
| | | 1794-IA16 | 120Vac 16 Input Module | |
| | | 1794-OA8 | 120Vac Output Module | |
| | | 1794-OA8I | 120Vac 8 Isolated Output Module | |
| | | 1794-OA16 | 120Vac 16 Output Module | |
| | 220Vac Modules | 1794-IM8 | 220Vac 8 Input Module | |
| | | 1794-IM16 | 220Vac 16 Input Module | |
| | | 1794-OM8 | 220Vac 8 Output Module | |
| | | 1794-OM16 | 220Vac 16 Output Module | |
| DC I/O  | 5Vdc Modules | 1794-IG16 | 5Vdc 16 TTL Input Module | |
| | | 1794-OG16 | 5Vdc 16 TTL Output Module | |
| | 24Vdc Modules | 1794-IB8 | 24Vdc 8 Sink Input Module | |
| | | 1794-IB10X0B6 | 24Vdc 10 Sink Input/6 2A Source Output Module | |
| | | 1794-IB10X0B6XT | 24Vdc 10 Sink Input/6 2A Source Output Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IB16 | 24Vdc 16 Sink Input Module | |
| | | 1794-IB16XT | 24Vdc 16 Sink Input Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IB16D | 24Vdc 16 Sink Input Module, with Diagnostics | |
| | | 1794-IB16X0B16P | 24Vdc Combo Module, 16 Sink Inputs/16 Source Outputs, Protected Module | |
| | | 1794-IB32 | 24Vdc 32 Sink Input Module | |
| | | 1794-IV16 | 24Vdc 16 Source Input Module | |
| | | 1794-IV32 | 24Vdc 32 Source Input Module | |
| | | 1794-OB8 | 24Vdc 8 Source Output Module | |
| | | 1794-OB8EP | 24Vdc Electronically Fused 8 2A Output Module, Protected | |
| | | 1794-OB8EPXT | 24Vdc Electronically Fused 8 2A Output Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-OB16 | 24Vdc 16 Source Output Module | |
| | | 1794-OB16D | 24Vdc 16 Source Output Module, with Diagnostics | |
| | | 1794-OB16P | 24Vdc 16 Source Output Module, Protected | |
| | | 1794-OB16PXT | 24Vdc 16 Source Output Module, Protected, XTEMP (-20 °C to 70 °C) | |
| | | 1794-OB32P | 24Vdc 32 Source Output Module, Protected | |
| | | 1794-OV32 | 24Vdc 32 Source Output Module | |
| | | 1794-OV16 | 24Vdc 16 Sink Output Module | |
| | | 1794-OV16P | 24Vdc 16 Sink Output Module, Protected | |
| | | 48Vdc | 1794-IC16 | 48Vdc 16 Sink Input Module |
| | | | 1794-OC16 | 48Vdc 16 Source Output Module |
| | | 125Vdc | 1794-IH16 | 125Vdc 16 Sink Input Module |

| | Product | Catalog Number | Description | |
|---|--------------------------------|-----------------------|--|-------------|
| Analog I/O  | 24Vdc Analog Modules | 1794-IE4XOE2 | 24Vdc 4 Input/2 Output Analog Combo Module | |
| | | 1794-IE4XOE2XT | 24Vdc 4 Input/2 Output Analog Combo Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IE8 | 24Vdc Selectable Analog 8 Input Module | |
| | | 1794-IE8XT | 24Vdc Selectable Analog 8 Input Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IE8H | 24V dc Selectable Analog, 8 Input, with HART pass-thru | |
| | | 1794-IE8XOE4 | 24Vdc 8 Input/4 Output Selectable Analog Module | |
| | | 1794-IE12 | 24Vdc Selectable Analog 12 Input Module | |
| | | 1794-OE4 | 24Vdc Selectable Analog 4 Output Module | |
| | | 1794-OE4XT | 24Vdc Selectable Analog 4 Output Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-OE8H | 24Vdc Selectable Analog 8 Output, with HART pass-thru | |
| | | 1794-OE12 | 24Vdc Selectable Analog 12 Output Module | |
| Isolated Analog I/O  | Analog Modules | 1794-IF4I | 24Vdc Source Isolated 4 Input Module | |
| | | 1794-IF4IXT | 24Vdc Source Isolated 4 Input Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IF2XOF2I | 24Vdc 2 Input/2 Output Isolated Analog Combo Module | |
| | | 1794-IF2XOF2IXT | 24Vdc 2 Input/2 Output Isolated Analog Combo Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-OF4I | 24Vdc Source Isolated 4 Output Module | |
| | | 1794-OF4IXT | 24Vdc Source Isolated 4 Output Module, XTEMP (-20 °C to 70 °C) | |
| | | 1794-IF8IH | FLEX Isolated HART Analog Input | |
| | | 1794-OF8IH | FLEX Isolated HART Analog Output | |
| | | 1794-IF8IHNFXT | FLEX Isolated HART Analog 8 Input Module, XTEMP (-25 °C to 70 °C) | |
| Relay Specialty I/O  | Relay Module | 1794-OW8 | 8 Isolated Relay Output Module | |
| | | 1794-OW8XT | 8 Channel Relay Output Module, XTEMP (-20 °C to 70 °C) | |
| | Encoder Input Module | 1794-ID2 | 24Vdc 2 Channel Incremental Encoder Input Module | |
| | Frequency Input Module | 1794-IJ2 | 24Vdc 2 Input Frequency Module | |
| | | 1794-IJ2XT | 2 Channel Counter Module, XTEMP (-20 °C to 70 °C) | |
| | Pulse Counter Input Module | 1794-IP4 | 24Vdc 4 Channel Pulse Counter Module | |
| | RTD Input Module | 1794-IR8 | 24Vdc RTD Input Module | |
| | Thermocouple/RTD Input Module | 1794-IRT8 | 24Vdc Thermocouple/RTD/mV Module | |
| | | 1794-IRT8XT | 24Vdc Thermocouple/RTD/mV Module, XTEMP (-20 °C to 70 °C) | |
| | Thermocouple/mV Input Module | 1794-IT8 | 24Vdc Thermocouple/mV Module | |
| | Very High Speed Counter Module | 1794-VHSC | 24Vdc 4 Digital Output Module | |
| | Power Supply | Power Supply | 1794-PS13 | 24Vdc, 1.3A |
| | | | 1794-PS3 | 24Vdc, 3.0A |

| Product | Catalog Number | Description | |
|--|---|--|--|
| Accessories | Accessories | 1794-CE1 | Extender Cable, 0.3m (1 ft.) |
| | | 1794-CE3 | Extender Cable, 0.9m (3 ft.) |
| | | 1794-CJC2 | Cold Junction Compensator Kit |
| | | 1794-N2 | FLEX Dummy Filler Module |
| | | 1794-NM1 | Mounting Kit for panel mounting |
| | | 1794-LBL | Label Kit for terminal bases |
| | | 1492-EA35 | DIN Rail Locks (for vertical mounting) |
| | Product Selection & Configuration Tools: www.rockwellautomation.com/global/support/product-selection-configuration | | |
| Product | | | |
| Certifications ² | | UL Listed Industrial Control Equipment | |
| | | UL Listed for Class I, Division 2 Groups A, B, C, D Hazardous Locations | |
| | | CE Marked for all applicable directives ³ | |
| | | CSA Certified Process Control Equipment for Class I, Division 2 Group A, B, C, D Hazardous Locations | |
| | | C-Tick Marked for all applicable acts | |
| | | Marine Certification ⁴ | |
| | SIL 2 Certification ⁵ | | |
| XT Products | | FLEX I/O-XT™ products are conformal coated to protect against harsh environments. | |
| Publications | | 1794-SG002_-EN-P FLEX Selection Guide | |
| | | XT-PP001_-EN-P Extreme Environment System Product Profile | |
| ³ When marked. See www.rockwellautomation.com/global/certification for Declarations of Conformity, Certificates, and other certification details. ⁴ See the Certification for Marine and Off-shore Applications web site for details ⁵ See the SIL 2 under TÜV certificate: www.rockwellautomation.com/global/certification | | | |



Encompass Partner Products

Our Encompass™ program creates a path for critical information exchange and improved product solutions by linking the technical and commercial resources of Rockwell Automation and the best suited Encompass partner.

For more information go to locator.rockwellautomation.com/Encompass and search for FLEX I/O under product information.

Allen-Bradley, Encompass, FLEX, FLEX I/O-XT, LISTEN. THINK. SOLVE., Rockwell Automation and Rockwell Software are trademarks of Rockwell Automation, Inc. ControlNet, DeviceNet and EtherNet/IP are trademarks of ODVA, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846