


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.3 LBS


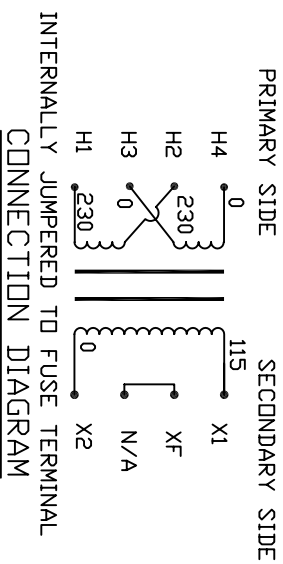


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
  3. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

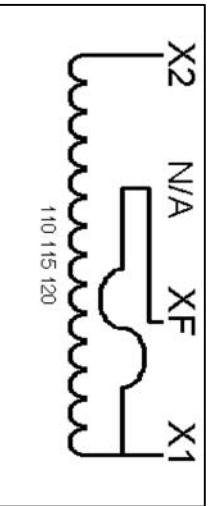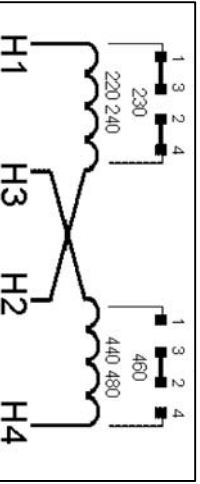

**MICRON** **Impervitran**  
 U.S. PAT. NO. 3,516,040  
 150VA 50/60Hz  
 TEMP CL. 130°C  
 CAT. NO. B150BTZ13JKF  
 SERIES 2  
 04082

DATE	REV	BY	CHKD	APP'D
10/29/07	1	JGV		
<p>MICRON TRANSFORMERS CORPORATION            7700 S. GARDNER AVENUE            CHANDLER, AZ 85226            WWW.MICRONTRANSFORMERS.COM</p>				
DATE	REV	BY	CHKD	APP'D
10/29/07	1	JGV		
<p>MICRON TRANSFORMERS CORPORATION            7700 S. GARDNER AVENUE            CHANDLER, AZ 85226            WWW.MICRONTRANSFORMERS.COM</p>				
SIZE	SCALE	PART NO.		
C	NONE	B150BTZ13JKF		