


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- 2. CONSTRUCTED WITH CAT6A SCREENED 9 WIRE, FOUR TWISTED PAIR PLUS A 9TH WIRE, STRANDED 24AWG LSZH CABLE.
- 3. TERMINATED WITH (8 POSITION) UNSHIELDED MODULAR PLUG AND 1-9TH POSITION CONTACT AT BOTH ENDS.
- 4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

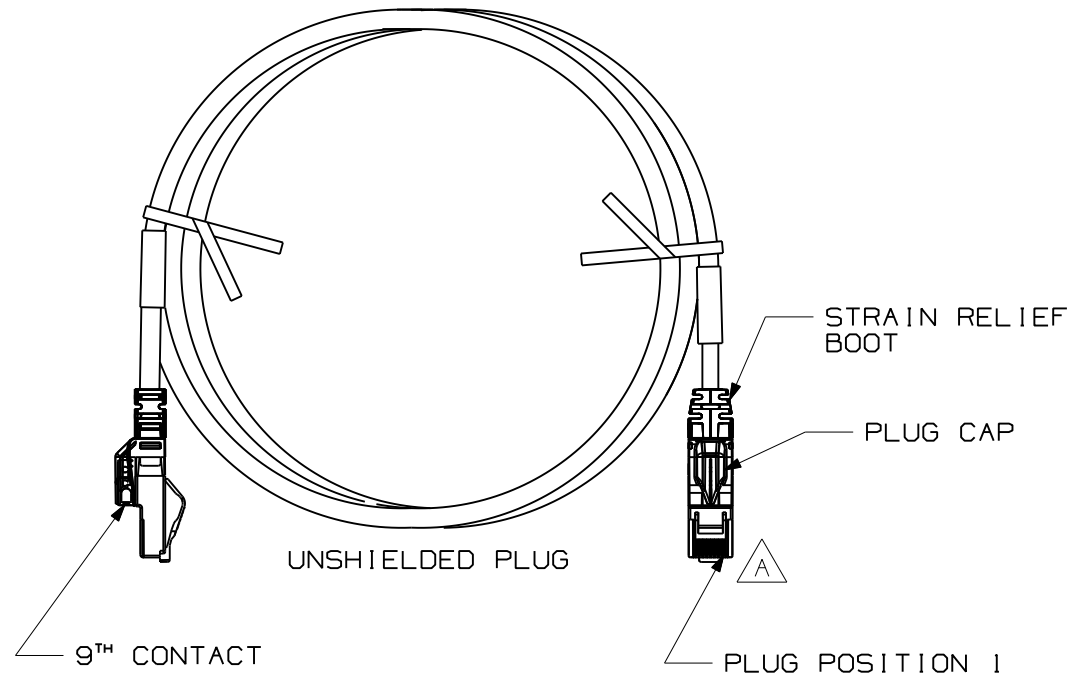

PANDUIT PART NUMBER	MINIMUM CABLE LENGTH	WEIGHT
PVUTP6X1MB**	1 METER	68g/EACH
PVUTP6X2MB**	2 METERS	115g/EACH
PVUTP6X3MB**	3 METERS	156g/EACH
PVUTP6X5MB**	5 METERS	234g/EACH
PVUTP6X10MB**	10 METERS	433g/EACH

EIA/TIA T568B WIRING SCHEME	
PLUG POSITION	CABLE WIRE
1	RED
2	ORANGE
3	BLACK
4	BLUE
5	WHITE
6	GREEN
7	YELLOW
8	BROWN

MODEL FILENAME	SIZE
DRAWING FILENAME	A
M01411BH_DC06/00B	

PANVIEW TX6 10GIG UNSHIELDED PATCH CORD CUSTOMER DRAWING

<p>PANDUIT™ CORP. TINLEY PARK, ILL 60477</p>	I.I. NUMBER
	PRODUCT SPEC/ PKG SPEC
<p>THIRD ANGLE PROJECTION</p>	ASSY METHOD/ TEST METHOD
<p>ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.</p> <p>DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.005 (.XX) ±.01 ANGLES ± 1°</p>	SCALE
DRAWN BY MLJ	NONE
DATE 9/05/07	PART NO. PVUTP6X*MB**
CHK'D DCK	DRAWING NO. 01411-06

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	11-30-09	MDJR		A. UPDATED PLUG HOUSING WITH NEW KEYED PLUG HOUSING.	02489-03				
R	9/10/07	MLJ	DCK	RELEASED TO PRODUCTION	02489-03				